


N5 Angled Roof Panel

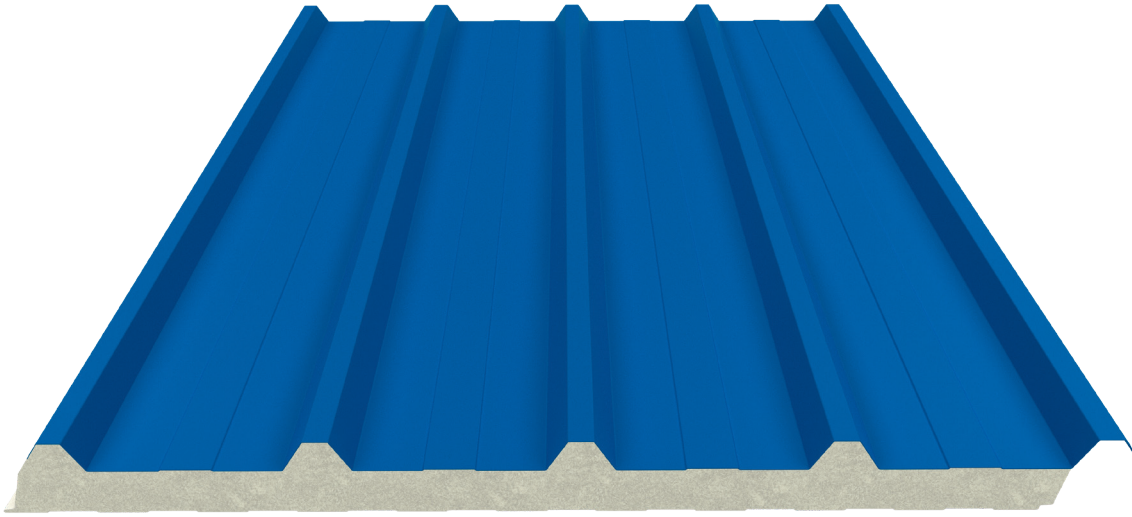

Product Information

Sandwich panel with a five-ribbed angled joint. Roof covering can be installed at a 7% slope. Its greatest advantage is the quick installation enabled by the angled panel joint and its high air and water tightness performance. Its ribbed form ensures that wide spans can be safely crossed.

Production Plant

Balıkesir

Product Application

- Industrial Buildings
- Military Buildings
- Public Buildings
- Agricultural Buildings
- Sports Facilities
- Construction Site Buildings
- Silos
- Hypermarkets
- Shopping Centers
- Storehouse Halls
- Administrative Buildings

and all other concrete structures with steel or prefabricated load bearing systems.

Assan Panel reserves the right to change the features of its products. The property rights of third parties must be respected. Acceptance of all orders is based on our current terms of sale and shipping. Users should always consider the latest edition of the Local Product Information Sheet for the relevant product, which can be obtained by contacting Assan Panel.

Performance Advantages

It provides maximum performance in water and air tightness with its angled joint feature.

It has the best thermal insulation values.

Quick and hassle-free installation saves both time and labour.

PIR does not retain water and does not harbour bacteria or pests.

It has an environmentally friendly core filling.


Its coloured surface eliminates the need for additional coatings such as plaster or paint.

Colour selection is available from the RAL catalogue.

Surface paint options (Polyester, PvdF, Plastisol, PVC) are available to suit the intended location.


It can be used as a roof covering with a minimum slope of 10%.

Measurements

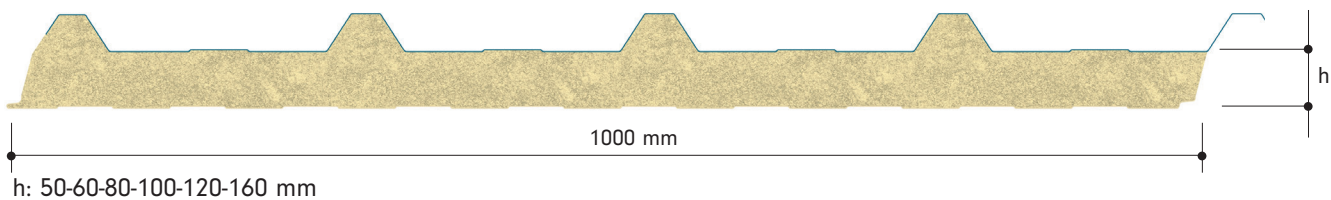


Favorable Width	1,000 mm
Minimum Height	3 meters
Minimum Width	Depends on the transport conditions.

SmartCore – PIR Elite – PIR

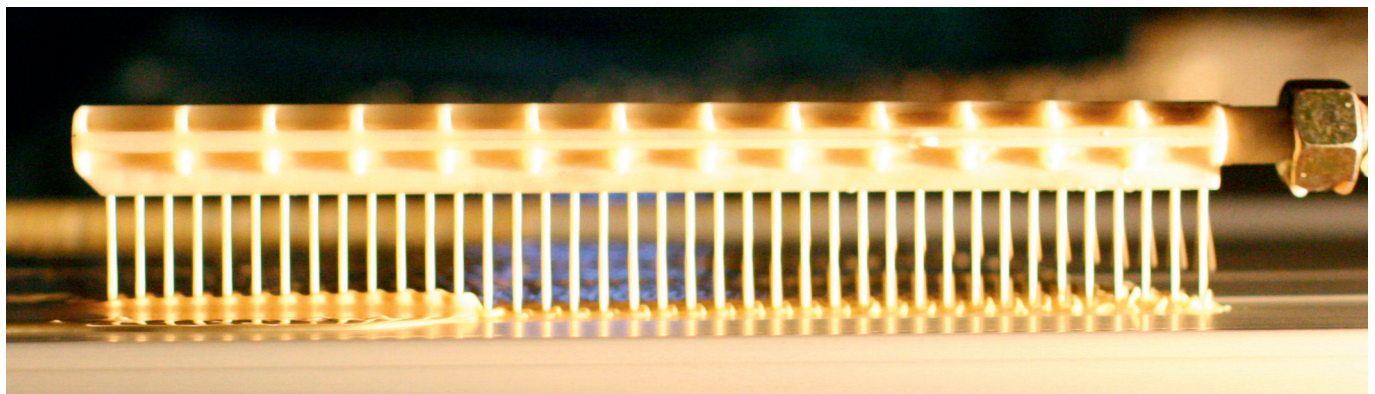

Density (EN 1602)	PIR: 40 (± 2) kg/m ³ & SmartCore-PIR Elite: 41 (± 2) kg/m ³
Thickness	50-60-80-100-120-160 mm
Thermal Conductivity (EN 13165)	PIR Elite-PIR: 0.022-0.024 & SmartCore: 0.018-0.019 W/mK
Dimensional Stability (EN 13165)	Level DS (TH) 11
Reaction to Fire (EN 13501)	PIR Elite: B-s1,d0 & PIR: B-s2,d0
Water Absorption (EN ISO 354)	By Volume 2% (168 hours)
Closed Cell Rate (EN 14509)	95%
Vapour Diffusion Resistance (EN 12086)	30-100
Heat Resistance	-200/+110 °C

Steel Surfaces

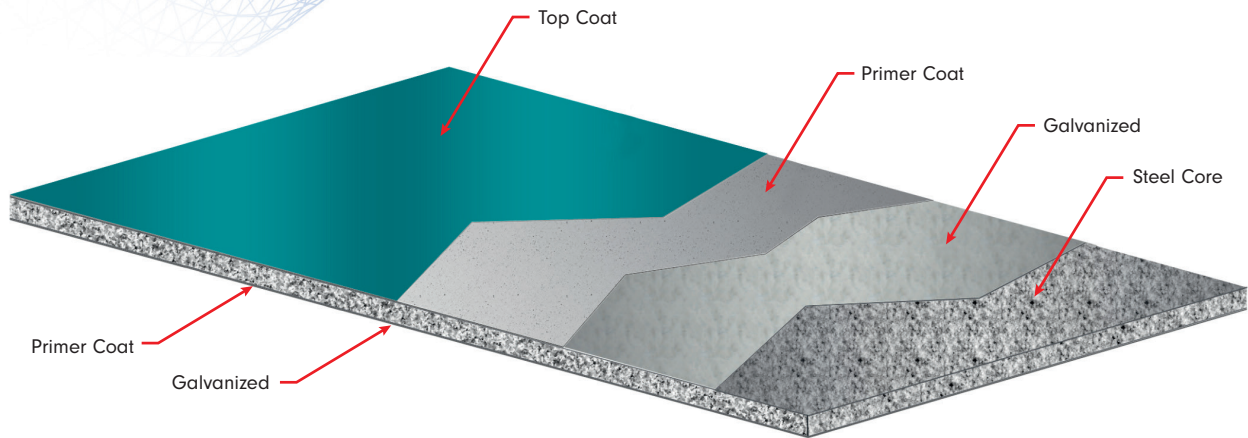

Prepainted Galvanized Steel Structure

Type	Prepainted Galvanized Steel Structure
External Facing Thickness	0.35-0.80 mm
Internal Facing Thickness	0.35-0.80 mm
Thickness Tolerance (EN 10143)	Nominal
Steel Quality (EN 10327)	Dx51 D+Z Prepainted Galvanized Steel (last coat polyester paint on primer)
Paint Type	Polyester, PvdF, Plastisol, PVC

Load Bearing Tables

BGS	BGS	Double Span					
External Sheet Thickness (mm)	Internal Sheet Thickness (mm)	PIR (mm)	150 cm	200 cm	250 cm	300 cm	350 cm
0.5	0.4	30	355	164	91	56	38
0.5	0.4	40	437	217	127	82	56
0.5	0.4	50	501	261	160	106	75
0.5	0.4	60	562	304	195	131	95
0.5	0.4	80	684	392	259	184	137
0.5	0.4	100	808	481	327	238	181
0.5	0.4	120	932	571	396	293	227

Load: kg/m² • Deflection: L/200 • PPGS: Prepainted galvanized sheet

Thermal Conductivity Values

Panel Thickness	U Thermal Conductivity (W/m ² K)	R Thermal Conductivity (m ² K/W)	R Thermal Conductivity (ft ² °F h/Btu)
30 mm	0.733	1.364	7.743
40 mm	0.550	1.818	10.324
50 mm	0.440	2.273	12.905
60 mm	0.367	2.727	15.485
80 mm	0.275	3.636	20.647
100 mm	0.220	4.545	25.809
120 mm	0.183	5.445	30.971
160 mm	0.138	7.273	41.295

Mechanical Properties

Steel Surface Yield Strength	min. 220 N/mm ²
Shear Strength of Core Material	min. 0,11 MPa
Shear Modulus of Core Material	min. 2,0 MPa
Compressive Strength of Core Material	min. 0,095 Mpa
Yield Coefficient	t=100,000 hrs (Free Load): 7.0 t=100,000 hrs (Snow Load): 2.4
Sheer Strength After Long-Continued Loading	t:1.000 hours min. 0,04 MPa t:2.000 hours min. 0,03 MPa t:100.000 hours min. 0,01 MPa
Bending Moment Capacity in Span	min. 2.3 KNm/m (Upwards) min. 2.0 KNm/m (Downwards)
Torsion Stress in Span	min. 100 MPa (Downwards) min. 115 MPa (Upwards)

According to TSE EN 14509.

Tolerance Values

Panel Length	Panel Thickness	Panel Cover Width	Rectangularity
If L ≤ 3,000 mm ± 5 mm If L > 3,000 mm ± 10 mm	D ≤ 100 mm ±2 mm	± 2 mm for all profiles	0.6% of s ≤ nominal cover thickness (Width x 0.006)


Standard Package

Thickness (mm)	30	40	50	60	80	100	120	160
Number	22	20	18	14	10	9	8	6


Standard Colour Options

RAL 3009	RAL 5010	RAL 5018	RAL 6021	RAL 7016	RAL 9002	RAL 9006
						

Joint Details

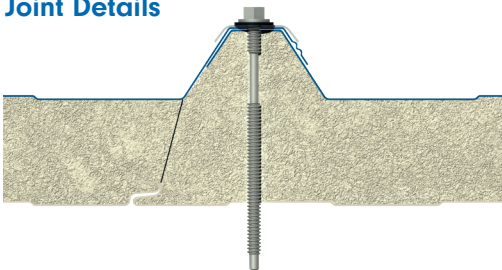


Transportation and Protection of Sandwich Panel




During hoisting, take precaution for the sling.



Do not drag panels in a pile, or on the roof purlins. Lift panels from both ends when moving or laying in place.



Panels to be stored on site for long periods should be stacked in covered areas. Wherever possible, always place stacks preferably on wooden wedges, against ground water.



For shorter periods, stacks should be arranged on sloppy areas with a simple scaffolding and polyethilen cover, leaving space for ventilation. Place stacks on a simple wedge.



Do not walk on panels.