




## G1040 Greca Polycarbonate Panel

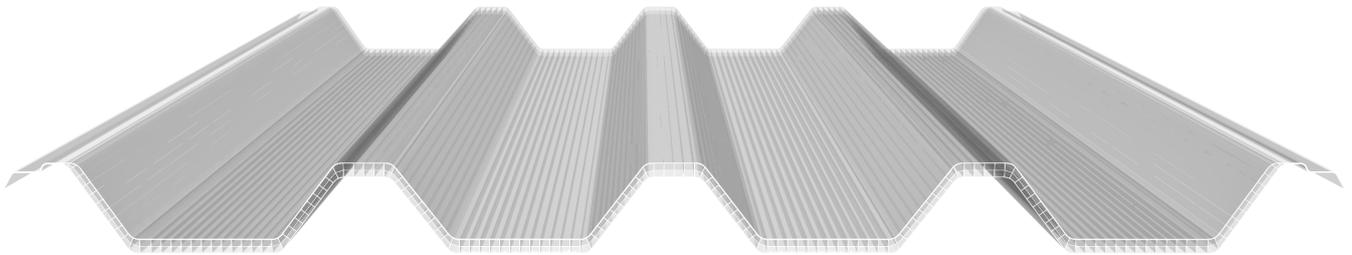

- Precise compatibility with any thickness of Master Panel R4 and Master Panel R3 sandwich panels. This compatibility provides fast and easy assembly.
- The capped joints and concealment of screws provides architectural aesthetics and prevents corrosion.
- The corrugated form provides high load capacity.
- Provides high waterproofing and thermal insulation when installed with Sandviç paneller.
- Suitable for every roof slope where sandwich panels can be installed.
- Possesses high heat resistance.
- High UV resistance.
- High heat resistance.
- Produced transparent or opaque for different light requirements.
- Can be produced in every length according to architectural requirements and transportation.

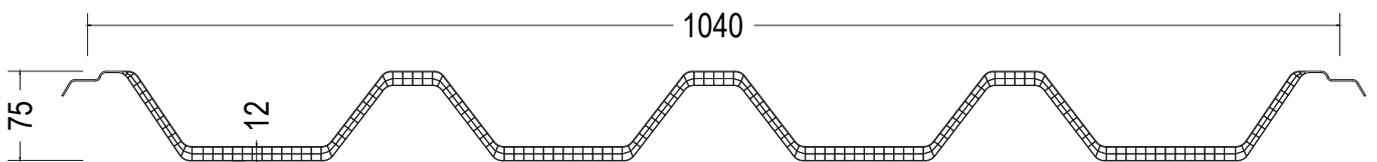

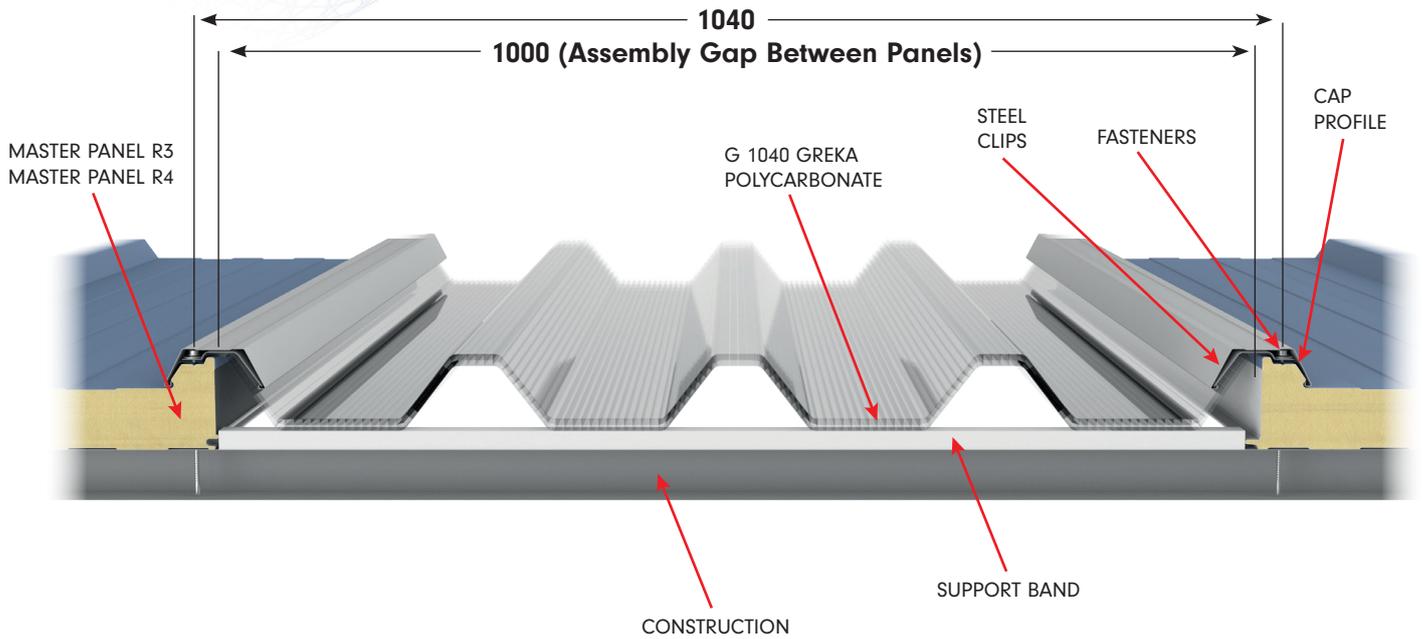

<b>Thickness</b>	12 mm
<b>Net Coverage Width</b>	1040 mm
<b>Assembly Gap Between Panels</b>	1040 mm
<b>Length</b>	Min 100 mm,
<b>Max. Depending on Transport and Assembly Conditions</b>	2,30 W/m <sup>2</sup> K
<b>Heat Transmission</b>	2,30 W/m <sup>2</sup> K
<b>Coefficient of Thermal Expansion</b>	0,065 mm/m°C
<b>Light Transmittance</b>	Transparent 72%, Opal 55%
<b>Temperature Resistance</b>	-40 °C/ + 120 °C

